

## Auto Booster Lite (GAB-5500) remote-control Glow Igniter

The present product is manufactured to enable various settings according to the purpose of users as a remote-control Glow Igniter. Please read User's Manual carefully and use it in a right way.

### Product Specifications

Working voltage : 4.8V to 8.4V  
 Working current : 20 mA (Waiting state)  
                           650 mA (7.4Vat the time of ignition)  
 Size (mm) : 10mm(H) x 40mm(W) x 23mm(L)  
 Weight : 7g (Main body)  
           17g (Cable included)

### Product Characteristics

- ◆ The Glow Plug can be **remotely ignited** with a transmitter by using a receiver channel(Gear, AUX, etc.).
- ◆ Incidents due to a propeller capable of being generated in an engine starting process of a plane can be prevented.
- ◆ it keeps safe as it controls not ignite engine on stunt flight mode nor engine throttle up by using program mixing of transmitter.
- ◆ A total of 5 steps' **control of plug heating intensity** is possible according to the battery voltage and the plug kinds of users.
- ◆ it is energy-saving with no noise and plug heating way with low frequency pulse.
- ◆ The **automatic fuse circuit** for prevention of circuit loss and protection of a receiver battery due to a plug terminal short(a short circuit) or abnormal over-current is built-in to improve safety.(If a danger element in a cut-off circuit is removed, it is automatically operating normally.)
- ◆ The plug ignition can be confirmed through LED and buzzer sound, and the short of the plug can be confirmed through the **Plug Check LED**.
- ◆ The plug can be automatically ignited according to the state of a transmitter's specific channel by using program mixing function of the transmitter.

Helicopter: Securing of starting safety by igniting a plug automatically in less than a hovering band or an auto-rotation mode.

Airplane: Improvement on low speed characteristics by igniting a plug automatically in a low speed band of a 4 cycle engine


- ◆ When a plane is crashed to scrubs or the bush, it can show RC search function and is equipped with a connecting terminal(AUX output) of a separate external large buzzer(85dB: sold separately) for plane passengers in addition to the built-in buzzer.
- ◆ The external buzzer, LED illumination for flight, a RC switch and others can be used variously according to the purpose of users by using a power supply of the AUX output terminal.

### Installation and a use method

1. A jump connector for control of plug ignition intensity of a main body is inserted into corresponding voltage with a tweezers and others to fit to the receiver's voltage of users before it is mounted to the airplane. Voltage setting is based on voltage supplied to a receiver. The voltage is initially set to be 4.8V at the time of product shipment. When the red-heat intensity of a plug is set to be stronger or weaker than the basic setting value, please insert after moving a jumper connector to be higher or lower than its own voltage connector. If the jumper connector is removed, we can make the red-heat the most brightly.

**CAUTION)** If the jumper connector is removed during booster operation, the plug may be burned due to overheating at voltage over 6.0V because it becomes the most bright heat state. Users of a power supply over 6V would set a jumper connector in an OFF state of booster operation.

2. Please fit cable polarity to a Gear or an Aux channel of the receiver and then connect it. Please refer to the following table for the terminal polarity.

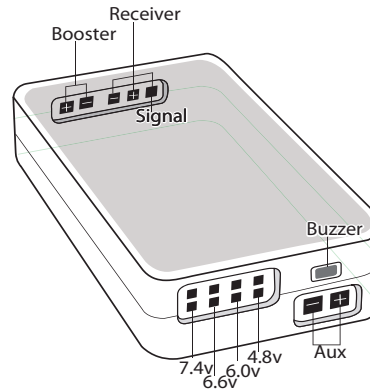

**Brown** : - terminal  
**Red** : + terminal  
**Orange**: Signal terminal

3. The JST cable is connected to the plug output terminal, the plug being connected to a crank case part of the engine, and the crocodile clip is connected and fixed to the plug.

**CAUTION)** if the crocodile clip is engaged too deeply with the plug head pin, it becomes a short. Please make it engaged with the tip a little.

4. There's SMT Buzzer inside of the product. By putting helicopter, airplane, and car's inside, when there's not enough apparatus, please put external Buzzer.(GEB-1010 Optional parts). you can connect it on AUX unit.
5. If the Gear or a corresponding channel is operated after a power supply is applied to the receiver, the booster is ignited together with a buzzer and LED. At this time, if switch motion and booster ON/OFF are operated reversely, please make the corresponding channel reverse in reverse setting of the control plane

### Caution and reference

- ◆ When you put this product near engine, please put form tape or something that can absorb vibration from engine for protection.
- ◆ when there's low C-rate, low charging, or loose connection between power switch, the servo shows shaking situation when plugging. it is easily misunderstood that noise is fluctuated, but it is by low power and please check power supply including batteries.

### Technical support & Customer Service

Contact your dealer or e-mail us at address below for questions about our products or Customer Service.

E-mail : [master@gryphon.co.kr](mailto:master@gryphon.co.kr)

### GRYPHON

673-39 Manchon1 Suseng-gu Daegu, Korea  
 TEL +82 53 783 1796  
 FAX +82 53 289 0724  
 ULR : <http://www.gryphon.co.kr>  
<http://www.gryphon-mall.com>