GosH 2 BL FPV RACER - USER MANUAL
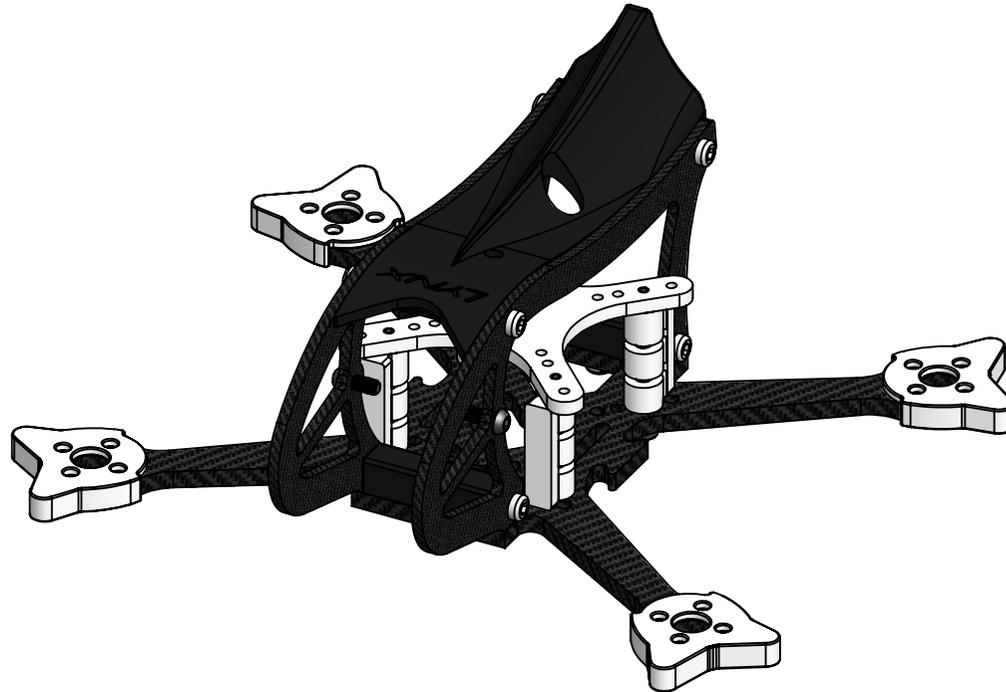

SPECIFICATIONS:
Weight: Frame: 26g.
Material: Carbon Fiber + Plastic.
Maximum propeller: 2.5 Inches.
Motor mount: Motor 11XX.
Flight controller mount: 16mm x 16mm (4 Holes).
20mm x 20mm (4 Holes)
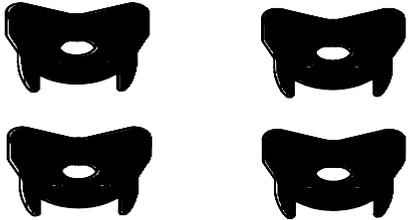**25mm x 25mm (4 Holes)**
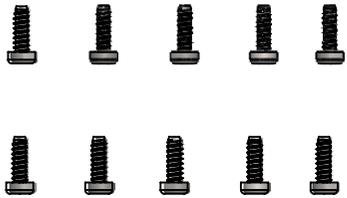**30.5mm x 30.5mm (4 Holes)**

LYNX
HELI INNOVATIONS

GosH 2 BL FPV RACER - USER MANUAL
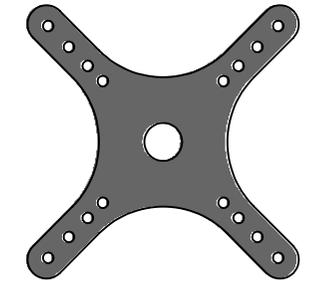
2 x RollBar Support

4 x Motor Dampener

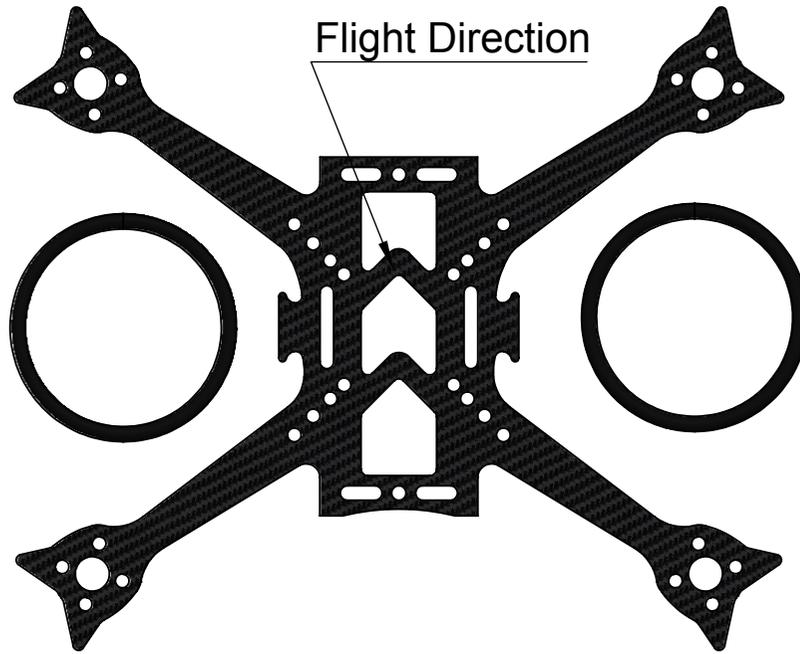2xBUTTON HEX CUP SCREW M2X4 - HEX SOCKET 1.5 for Camera

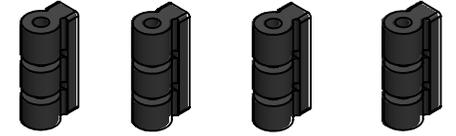10 x M2x6 HEX CUP SCREW SELF TAPPING BLACK

Flight Direction

Roll Bar
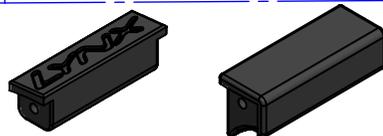
Cover A + B

Cover C

Receiver Support

4 x FC Mount

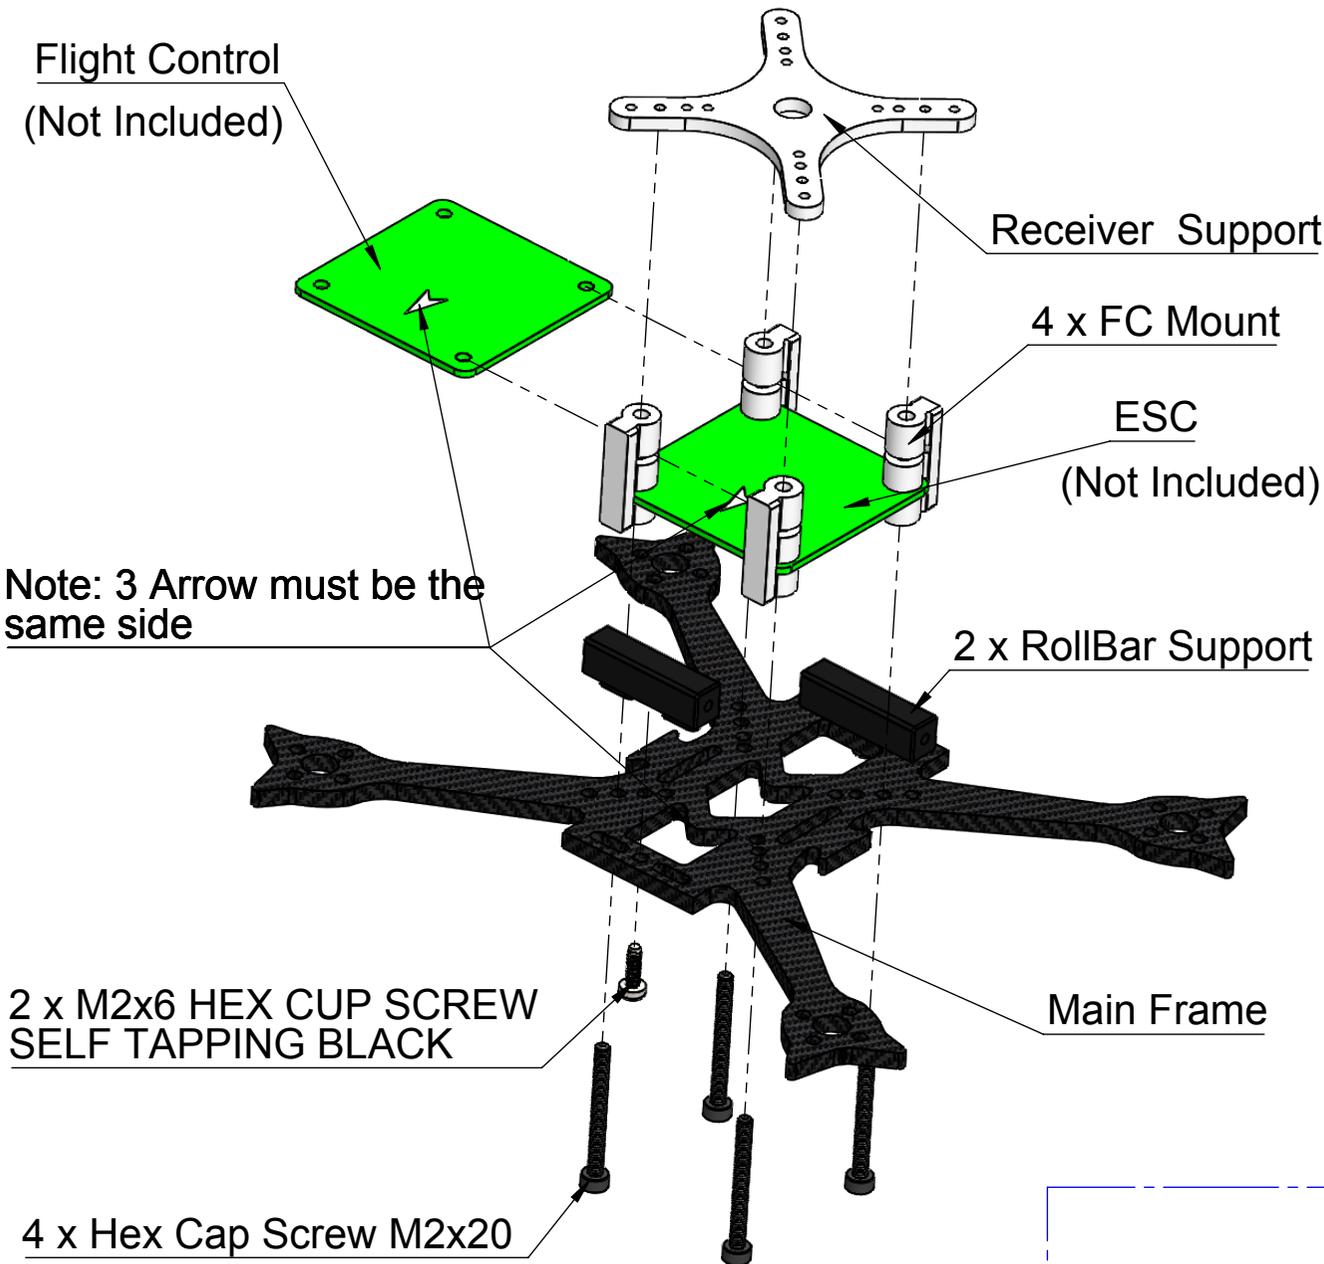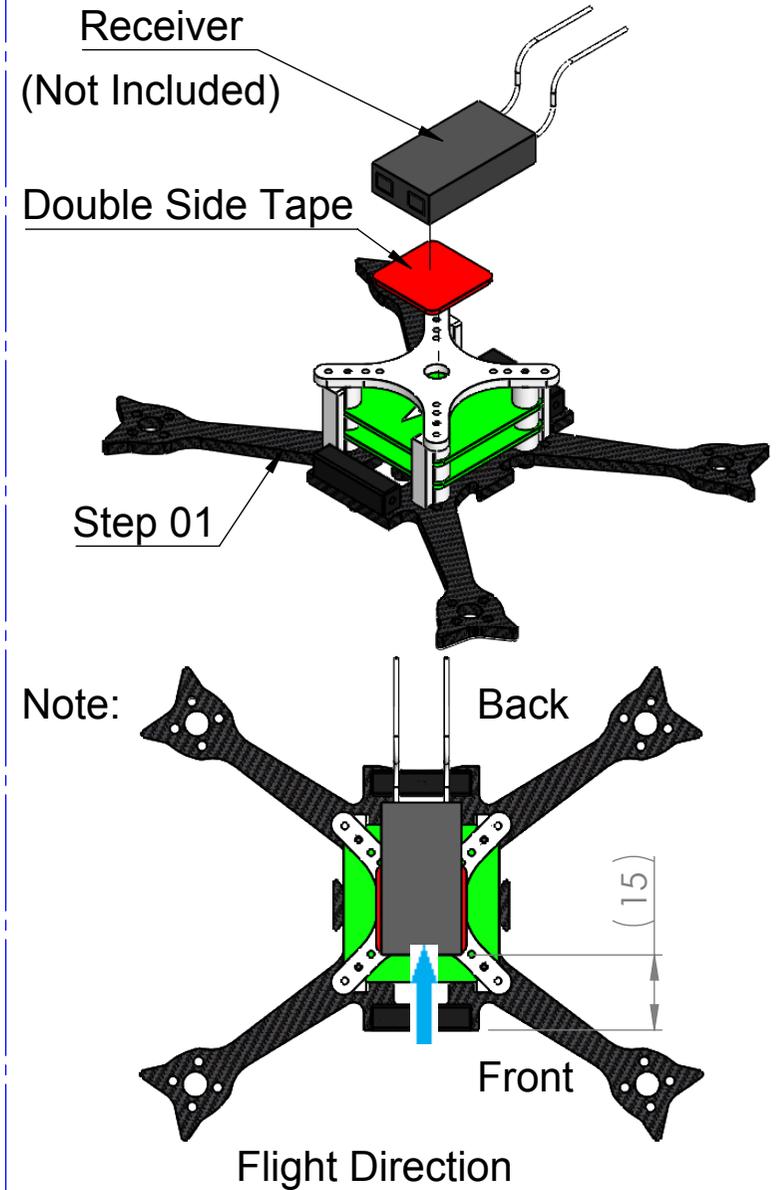4 x M1.6x4 PAN HEAD SCREW SELF TAPPING SILVER

4 x Hex Cap Screw M2x20

REV. 02-DATE:09/28/2017

LYNX
HELI INNOVATIONS
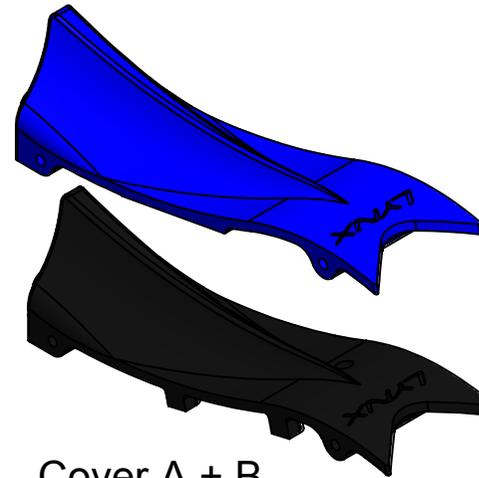
GosH 2 BL FPV RACER - USER MANUAL

Step 01: Flight Control, ESC Assembly

Flight Control
(Not Included)

Receiver Support

4 x FC Mount

ESC
(Not Included)

Note: 3 Arrow must be the same side

2 x RollBar Support

Main Frame

2 x M2x6 HEX CUP SCREW SELF TAPPING BLACK

4 x Hex Cap Screw M2x20

Step 02: Receiver Assembly

Receiver
(Not Included)

Double Side Tape

Step 01

Note:

Back

(15)

Front

Flight Direction

GosH 2 BL FPV RACER - USER MANUAL

Step 03: Motor Assembly

4 x Motor 11XX

(Not Included)

4 x Motor Dampener

16 x Hex Cap Screw M2x6
(Not Included)

Step 04: VTX Assembly

4 x M1.6x4 PAN HEAD
SCREW SELF TAPPING
SILVER

VTX
(Not Included)

Use Cover Type A for Torrent 110
Standard Electronic
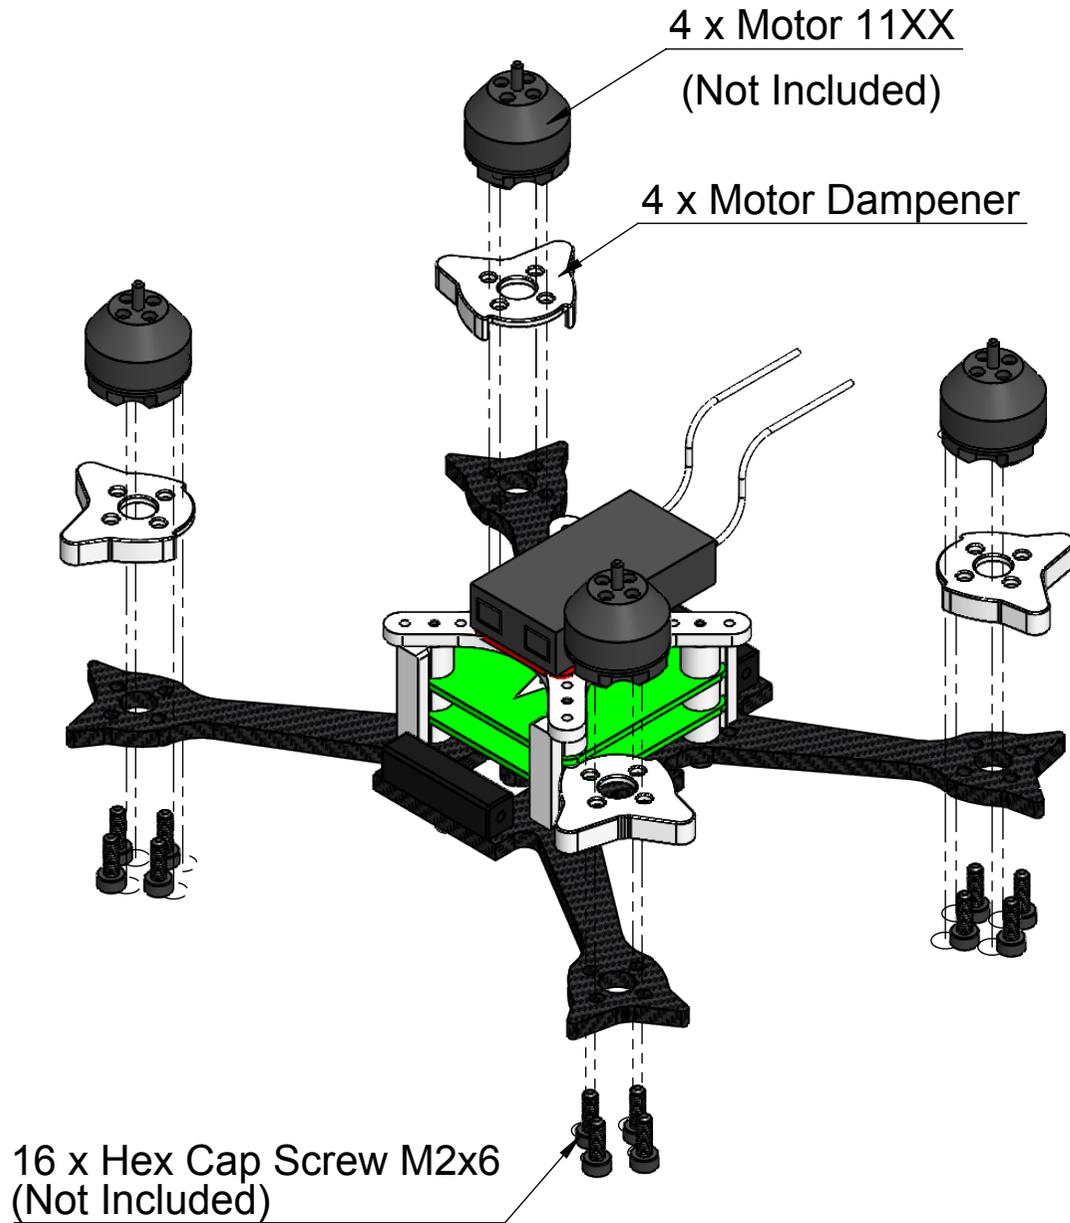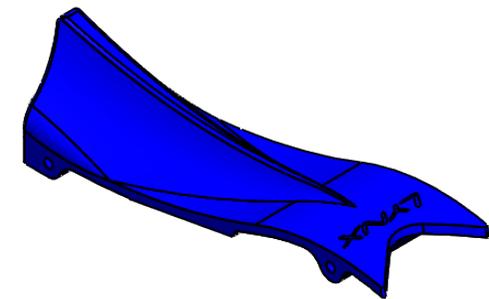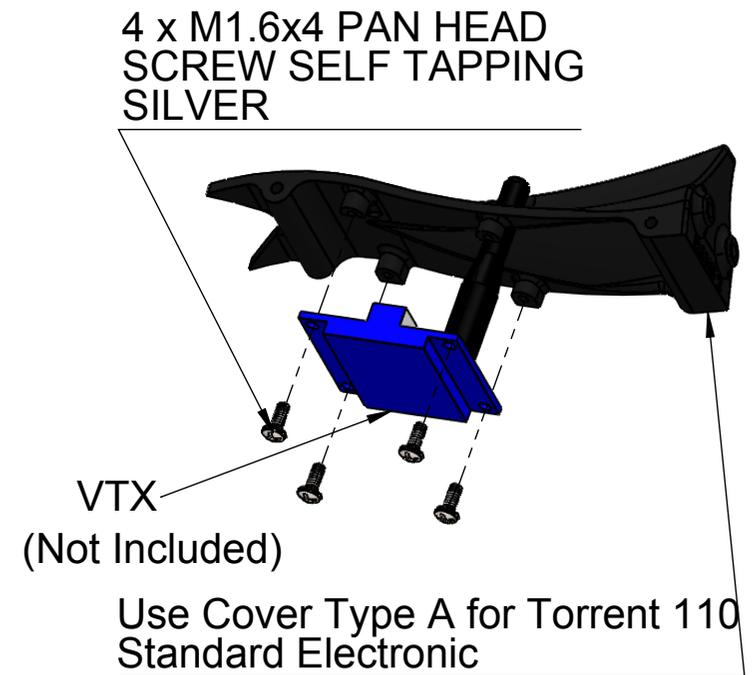
Use Cover Type B for Custom Building

HELI INNOVATIONS

GosH 2 BL FPV RACER - USER MANUAL

Step 05: RollBar Assembly

Step 04

Step 03

Back

Front

Flight Direction

2xRoll Bar

8 x M2x6 HEX CUP SCREW
SELF TAPPING BLACK
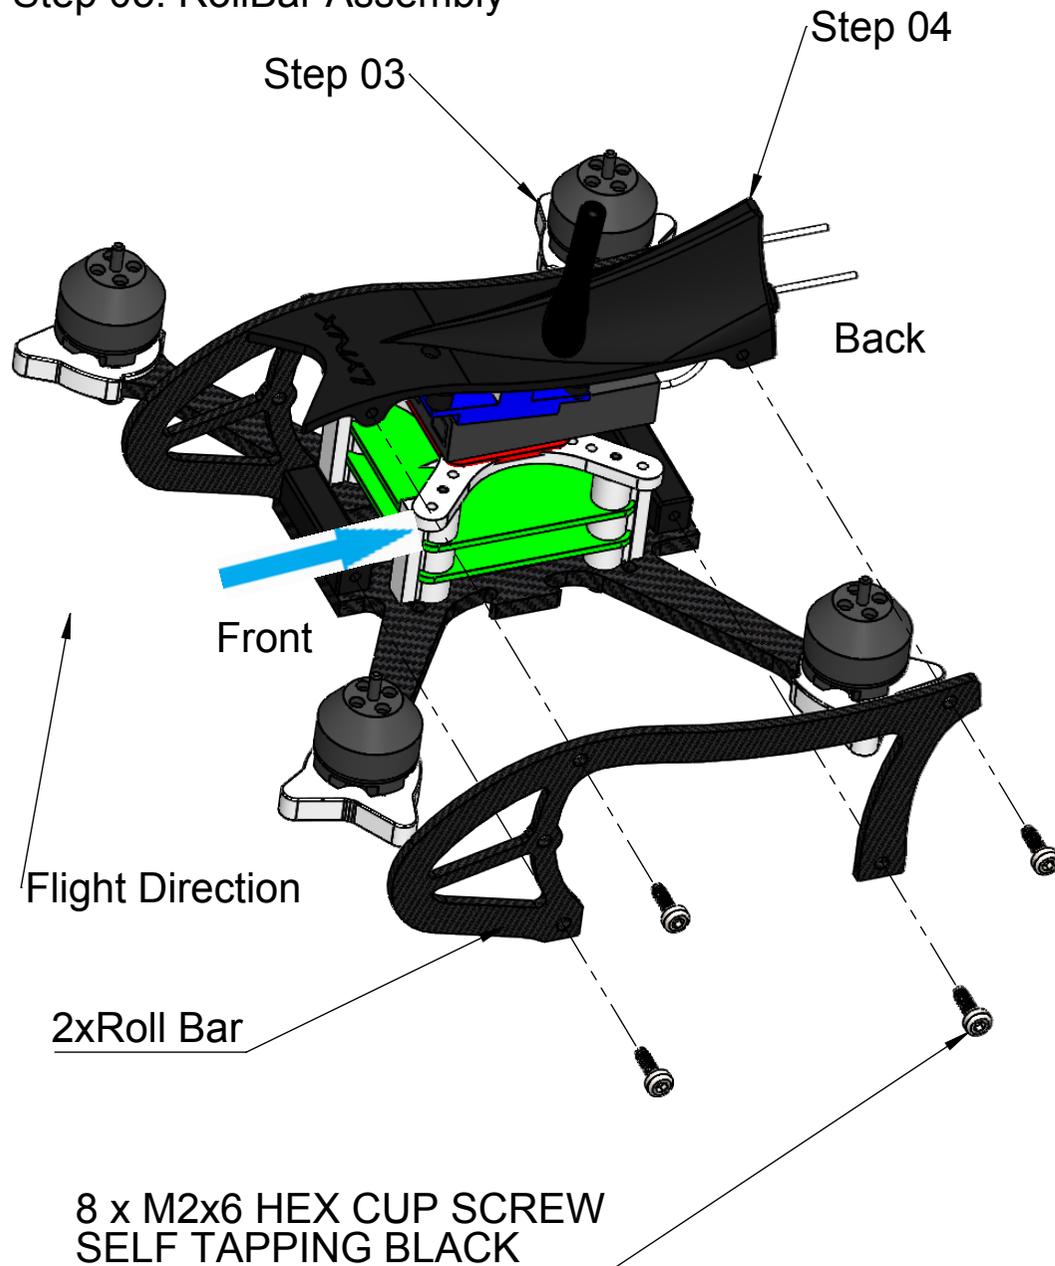
Note Step 05: Use Cover Type C (included) for lighter GosH

Step 06: Camera Assembly

Step 05

Camera: Micro Swift
(Not Included)

2xBUTTON HEX CUP
SCREW M2X4 - HEX
SOCKET 1.5

REV. 02-DATE:09/28/2017
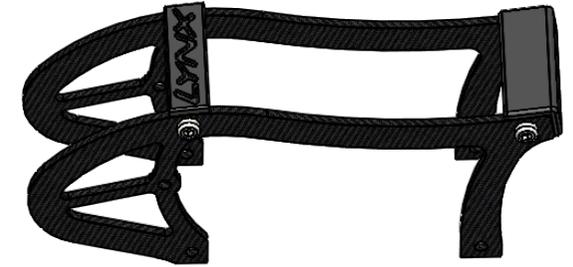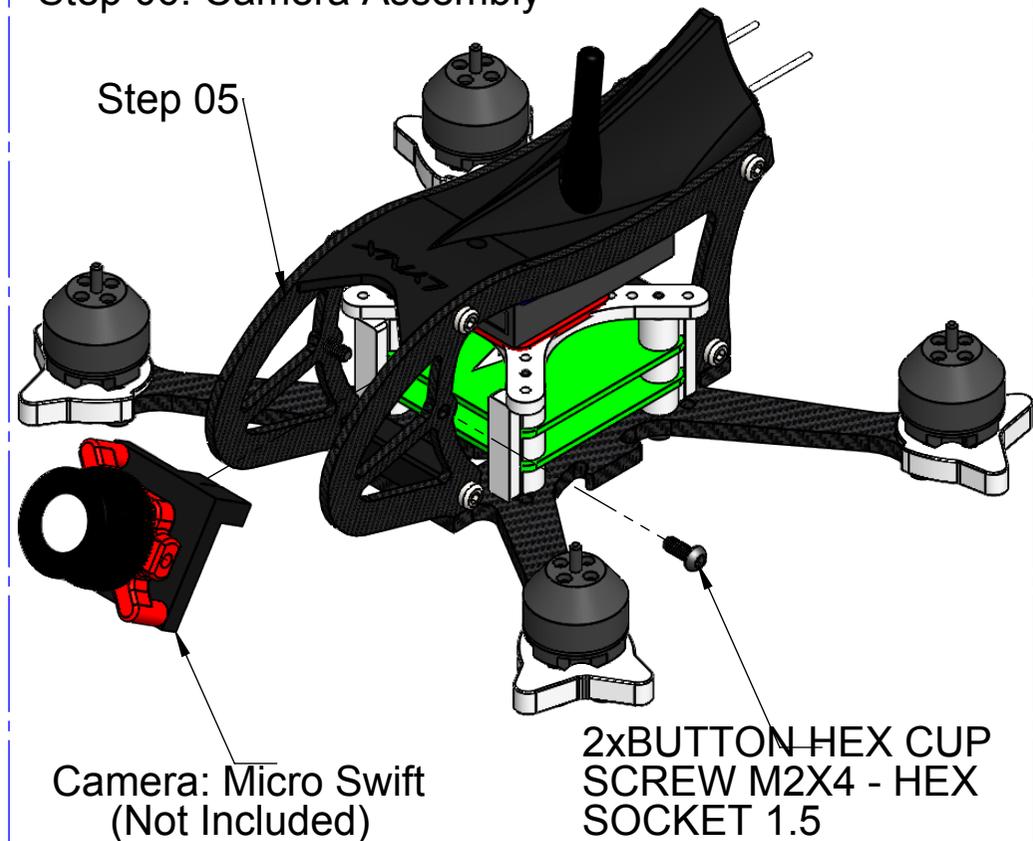
GosH 2 BL FPV RACER - USER MANUAL

Step 07: Propeller Assembly

Note rotation direction of the Propeller

2xCW Propeller
(Not Included)

2xCCW Propeller
(Not Included)

FRONT   Fly Direction

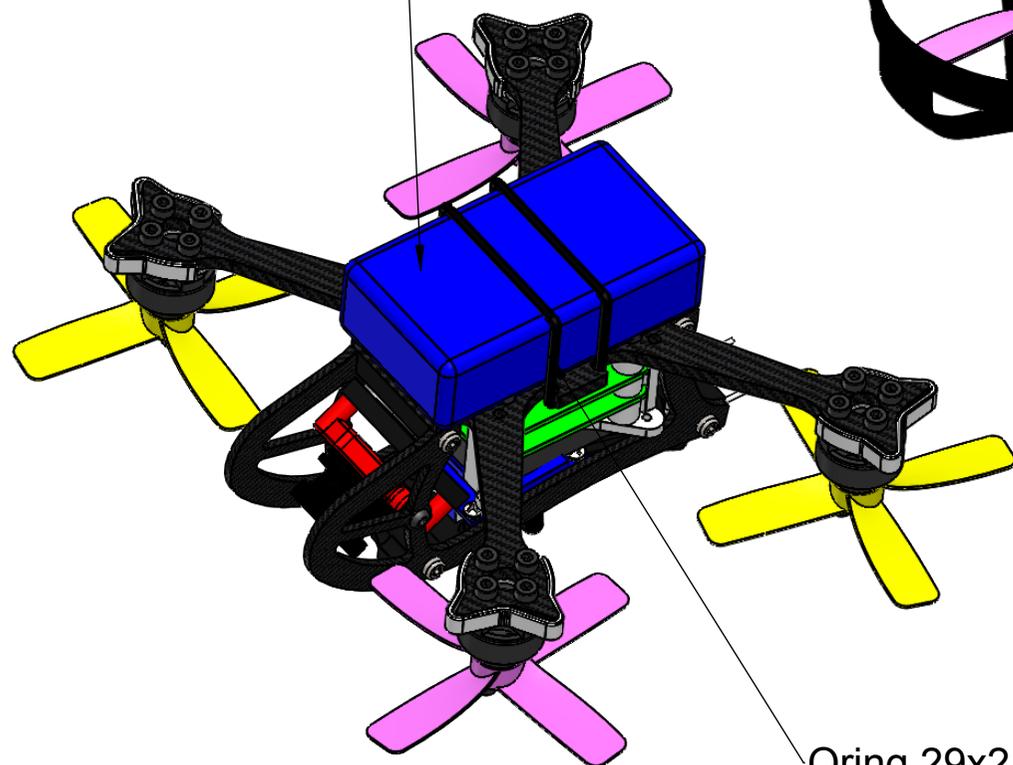BACK
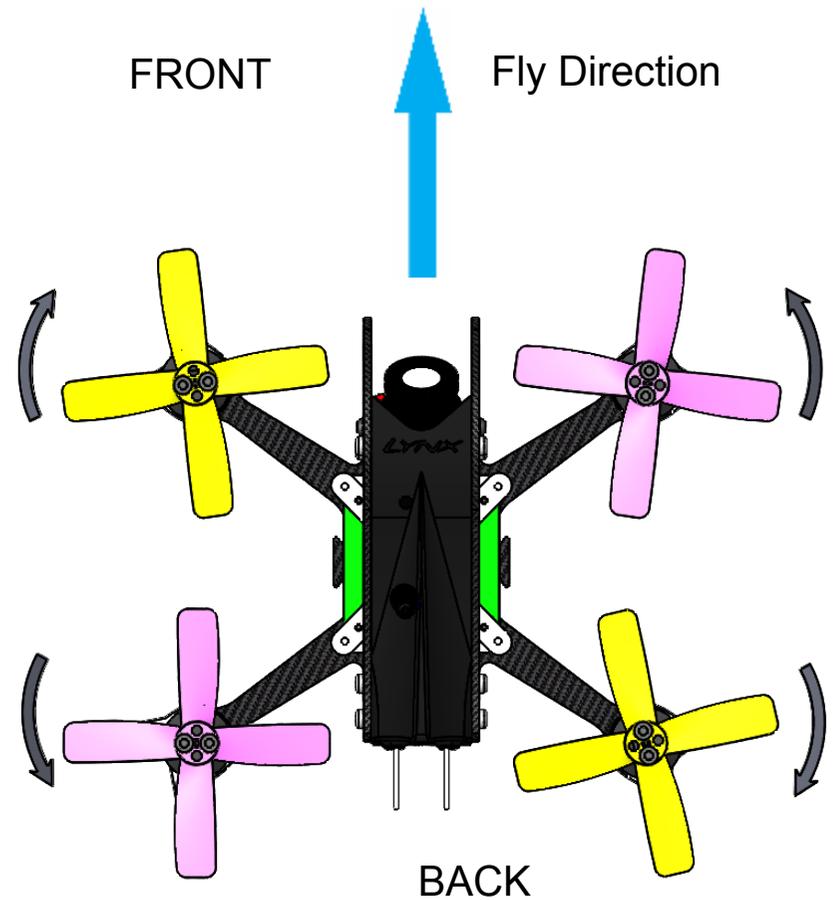
LYNX
HELI INNOVATIONS

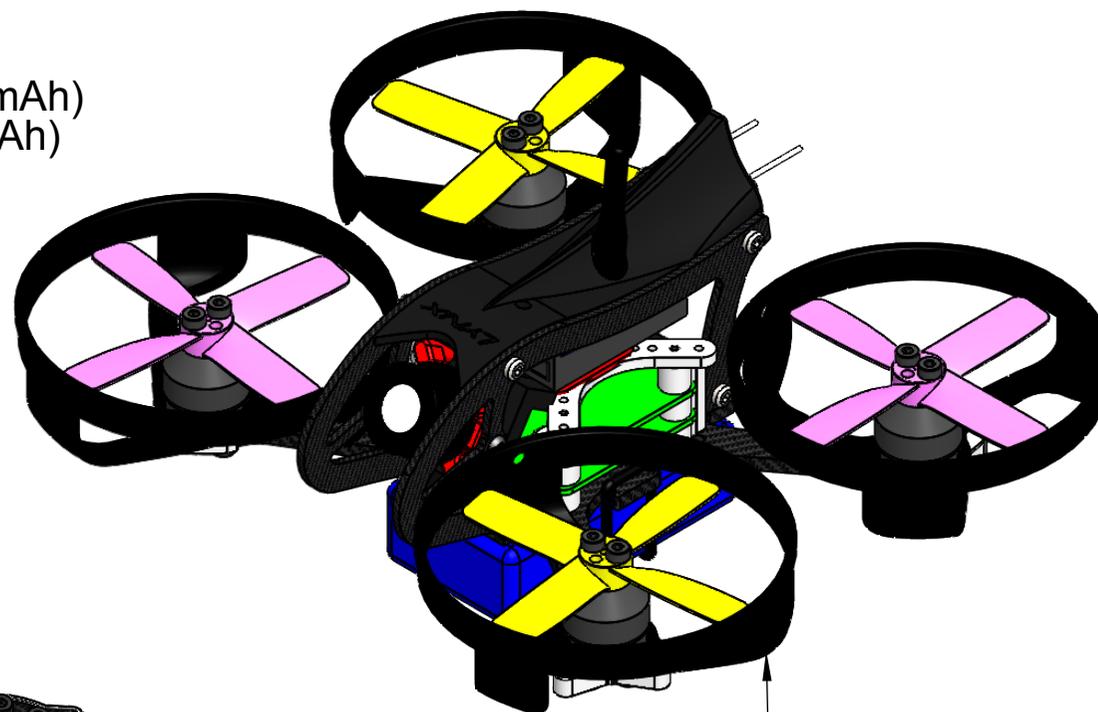# GosH 2 BL FPV RACER - USER MANUAL

Step 08: Battery Assembly

Battery
Suggest: 3S LiPo Battery Pack 30C (11.1V/450mAh)
         or 2S LiPo Battery Pack 30C (7.4V/800mAh)

(Not included)

GosH 2 - Shroud
(Not included)

Oring 29x2

LYNX
HELI INNOVATIONS